


Offset Shower Channel

For CPE membranes

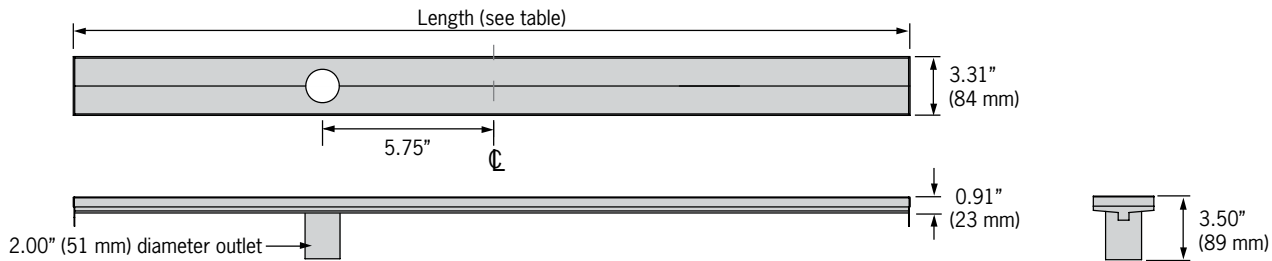

Product Table

Length (mm) inches	700 27.55	800 31.50	900 35.43	1000 39.37	PVC membrane coupling	Cast iron membrane coupling
Part No. Electro-polished	92226	92225	92224	92223	93871	93822
Weight lbs	2.2	2.5	2.8	3.1	1.1	4.7

Specification Clause

The QuARTz ACO ShowerDrain channel and grate system shall be stainless steel grade 304 manufactured by ACO Polymer Products, Inc. USA. The surface finish shall be Electropolished. Grate shall be Flag*/Hawaii*/Mix*/Pixel*/Quadrato*/Wave*/Tile*.

Shower channels shall be 3.31" (84mm) wide, with length as specified on Architects plans / Architects specification. Outlet spigot (O.D.) diameter shall be 50mm (2.0"). Outlet is set 5.75" off center of channel.

The PVC or cast iron membrane coupling [to provide connection to S/S spigot of shower channel and plumbing pipe system] shall be supplied by ACO Polymer Products Inc. This PVC or cast iron drain body will provide clamping ability for waterproof membrane. (supplied by others)

ACO recommends checking local plumbing codes prior to installation.

The system shall be installed in accordance with the manufacturer's instructions and recommendations.

*Delete as necessary

ACO Polymer Products, Inc.

West Sales Office
825 W. Beechcraft St.
Casa Grande, AZ 85122
Tel: (520) 421-9988
Toll Free: (888) 490-9552
Fax: (520) 421-9899

East Sales Office
9470 Pinecone Dr.
Mentor, OH 44060
Tel: (440) 639-7230
Toll free: (800) 543-4764
Fax: (440) 639-7235

Southeast Sales Office
4211 Pleasant Rd
Ft. Mill, SC 29708
Tel: (800) 543-4764
Toll Free: (800) 662-2377
Fax: (803) 802-1063

Follow us on



Electronic Contact:
 info@QuARTzbyACO.com
 www.QuARTzbyACO.com

